

## agria 8000-53 rotary mulcher

### For professional results:

- Robust mulcher with professional swing tip blades allowing longevity
- Special cutting blades assure best mulching results
- Easy to start smooth running Honda-OHC-Engine
- Solid rubber tyres prevent punctures even on rough ground
- Easy transport by car possible: compact design and foldable handlebar



Special cutting blades for best mulching results

### Technical data

### agria 8000-53 rotary mulcher

Article number	8000 511
Engine	HONDA GCV 190 OHC-4 stroke petrol engine, 190 cc 4,5 kW (6,5 SAE-HP) at 3600 rpm Recoil starter
Transmission	Worm gearing with V-belt clutch, independent switchable coupling and mulching systems 1 V (2,4 km/h)
Handlebar	Vertically and horizontally adjustable without tools
Tyres	Solid rubber tyres with AS tread
Cutting width	53 cm
Cutting height	6 cm and 9 cm on skids
Weight	73 kg

# Single purpose rotary cutters


**agria**

## agria 8000 brush cutters

### For professional results:

Brush cutters with rotary technology. The robust rotary cutters with either 58 cm or 64 cm cutting width cut both grass and reeds, as well as bushes with a diameter of up to 2 cm. The area of use lies between that of a hand held brush cutter and a bar mower. These smaller cutters can be used in areas where the bar mower is too wide or too heavy.

- Robust rotary cutting action
- Easy transport by car due to light weight and compact design
- Handlebar folds without tools
- Low maintenance cost

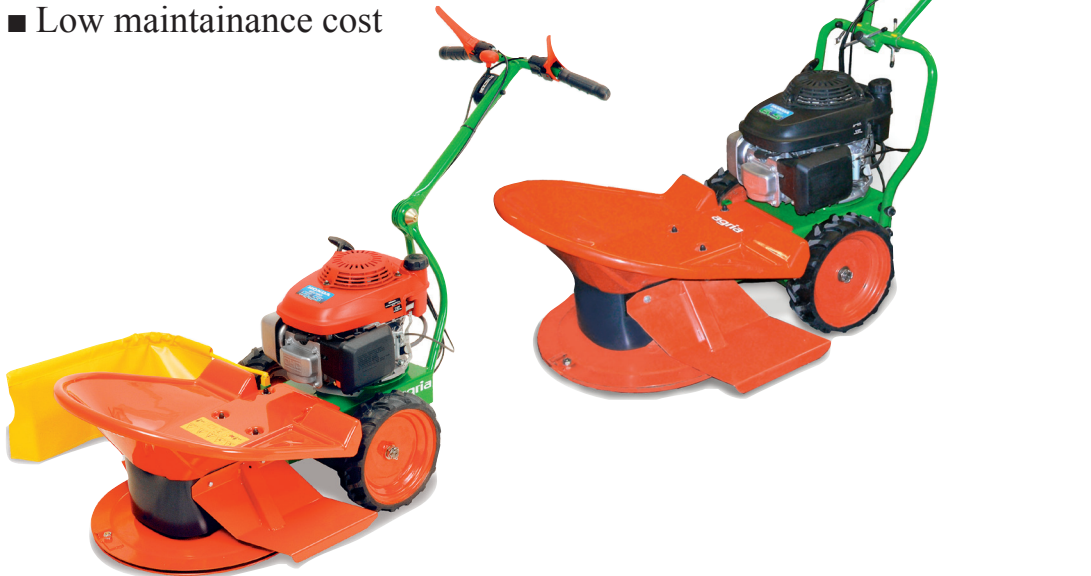

Cuts scrubs and bushes with a diameter of up to 2 cm



Detachable swath deflector



Folding handlebar...



...for easy transport

### Technical data **agria 8000-58** brush cutter

### **agria 8000-64** brush cutter

Article number	8000 611	8000 621
Engine	HONDA GCV 160 OHC-4 stroke petrol engine, 160 cc 4,1 kW (5,5 SAE-HP) at 3600 rpm Recoil starter	HONDA GCV 190 OHC-4 stroke petrol engine, 160 cc 4,8 kW (6,5 SAE-HP) at 3600 rpm Recoil starter
Transmission	Worm gearing with V-belt clutch 1 V (3,5 km/h)	Worm gearing with V-belt clutch 1 V (3,5 km/h)
Handlebar	Vertically and horizontally adjustable without tools	Vertically and horizontally adjustable without tools
Tyres	Solid rubber tyres with AS tread	Solid rubber tyres with AS tread
Working width	58 cm	64 cm
Weight	60 kg	62 kg