


MODELO SATUR de 110 a 350 C.V.

- Axial roller protection and self-aligning rotor system.**
- Special oil-tight cutting edges, with axial joint and labyrinth.**
- Central special gear drive crankcase.**
- Double chassis with over-shell and reinforced turret.**
- For maximum shaft height of 65cm.**
- Rear collector with pressure springs.**
- Maximum depth 40 cm.**
- For 1,000 r.p.m. shafts.**
- With torque limiter transmission.**
- 6 blades per disc, bolts and pins.**
- Return gears with oil pump.**
- 10 mm blades with 5/8" screws as standard.**
- Crankcase protector and mechanical flaps as standard.**
- Revolutions and characteristics adapted for high performance tractors.**
- Swivelling coupling supports for adaptation to tiller for difficult ground.**

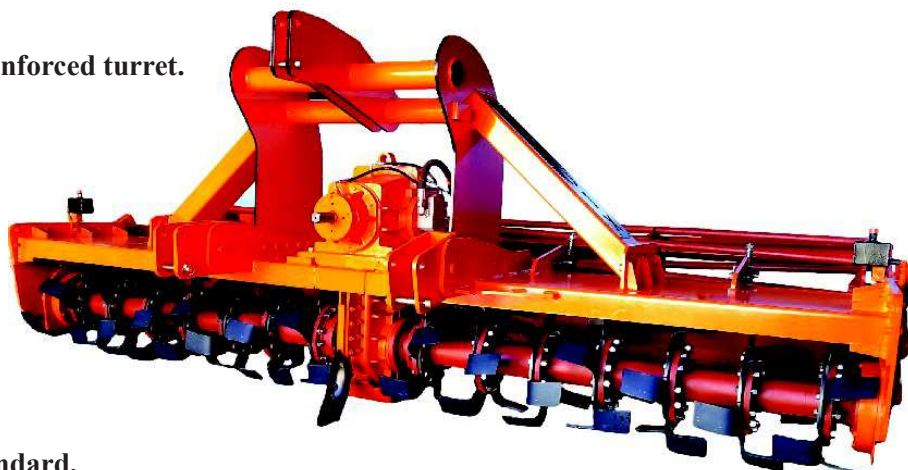

MODEL	N° OF BLADES	CUT WIDTH	TOTAL WIDTH	MAX POWER	WEIGHT
SATUR-25	48	2,390	2,500	110 - 350	1.800
SATUR-30	60	2,890	3,000	130 - 350	1.900
SATUR-35	72	3,390	3,500	150 - 350	2.100
SATUR-40	84	3,890	4,000	170 - 350	2.300
SATUR-45	96	4,390	4,500	190 - 350	2.500
SATUR-50	108	4,890	5,000	210 - 350	2.800

OPTIONS:

CODE	DESCRIPTION
01166	FOLDABLE HYDRAULIC FLAPS
01000	SPLINED TRANSMISSION
01172	TOP DISCS
	LATERAL GRILLE WITH END SUPPORTS