TRR HYDRAULIC TWO WAY PRUNING SHREDDERS 40 to 120 C.V.

With double effect turret and twin axle

With hydraulic lateral displacement

10 mm shell and lateral sections with structural reinforcements.

High performance professional model

With 10mm replaceable blades or hammers.

Comes with crumbling saws and counter-saws.

Casting rotor-bearing supports.


480 mm rotor diameter. 220 mm rear bearing diameter.

Double row auto-oscillating barrel bearings.

It included in the group freewheel system

Shredding capacity up to 12cm to 14cm diameter and grass.

Professional model high performance

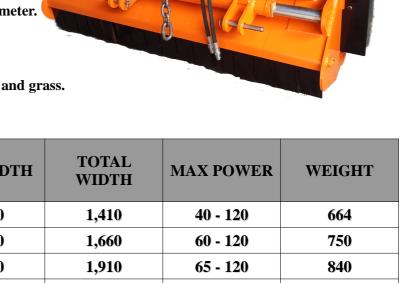

MODEL	BLADES / HAMMERS	CUT WIDTH	TOTAL WIDTH	MAX POWER	WEIGHT
TRR-125	24/12	1,250	1,410	40 - 120	664
TRR-150	32/16	1,500	1,660	60 - 120	750
TRR-175	40/20	1,750	1,910	65 - 120	840
TRR-200	48/24	2,000	2,160	80 - 120	928
TRR-230	56/28	2,300	2,460	90 - 120	1.034
TRR-250	56/28	2,500	2,660	100 - 120	1.109
TRR-280	64/32	2,800	2,960	100 - 120	1.204

OPTIONS:

CODE	DESCRIPTION
01108	CYLINDER REF. WITH HOSES AND VALVE
01120	CYLINDER REF. LONG WITH HOSES AND VALVE
01075	REAR HYDRAULIC WHEELS (NO ROLLER)
01074	REAR MECHANIC WHEELS (NO ROLLER)
Z1238	TRANSMISSION WITH FREE WHEEL
20086	THIRD POINT CHAIN
01191	CURTAIN WITH CHAINS