



# MDG - 70

Application areas: agriculture, earth moving


Type: leveler  
 Min. required power: 220 HP  
 Max required power: 350 HP  
 Overall length: 7,78 m  
 Overall width: 7,00 m  
 Working width: 7,00 m  
 Maneuver width: 2,50 m  
 Work wheel track: 5,60 m  
 Maneuver wheel track: 2,50 m  
 Wheels height: 0,84 m  
 Blade height: 1,00 m  
 Coupling hook height: 0,50 m  
 Estimated weight: 4.700 kg  
 Frame design: with double plates  
 Opening blade system: hydraulic  
 Folding blade: yes  
 Extensible blade: no  
 Opening axles system: batterfly  
 Extensible axles: yes  
 Oil filter: cartridge  
 Rocker arm (wheels): n° 2 balancer with 3 wheels  
 Slope of the blade: hydraulic  
 Lights system: yes  
 Receiver mast: n° 1 hydraulic extensible  
 Earth volume per run: 8,50 m<sup>3</sup>  
 Finishing speed (km/h): 12 km/h  
 Transport distance (m): 110 m  
 Laser system: hydraulic independent  
 Ready for laser system: yes  
 Ready for GPS system: yes  
 Laser system precision on 450 m: ± 2 mm  
 GPS system precision on 5 km: ± 10 mm

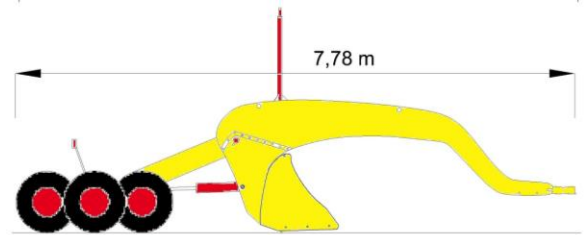


Overall length

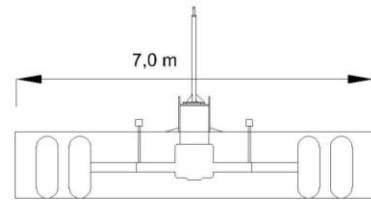


Working width



Maneuver width

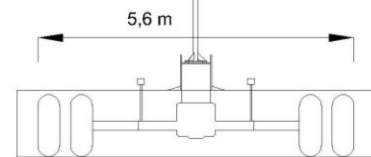

Work wheel track

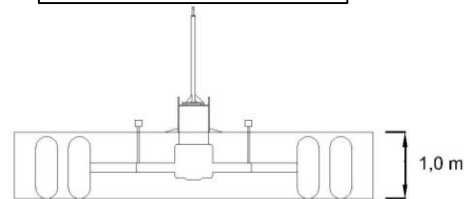

Blade height