


seppi m.®

THE BEST FOR FARM & FOREST

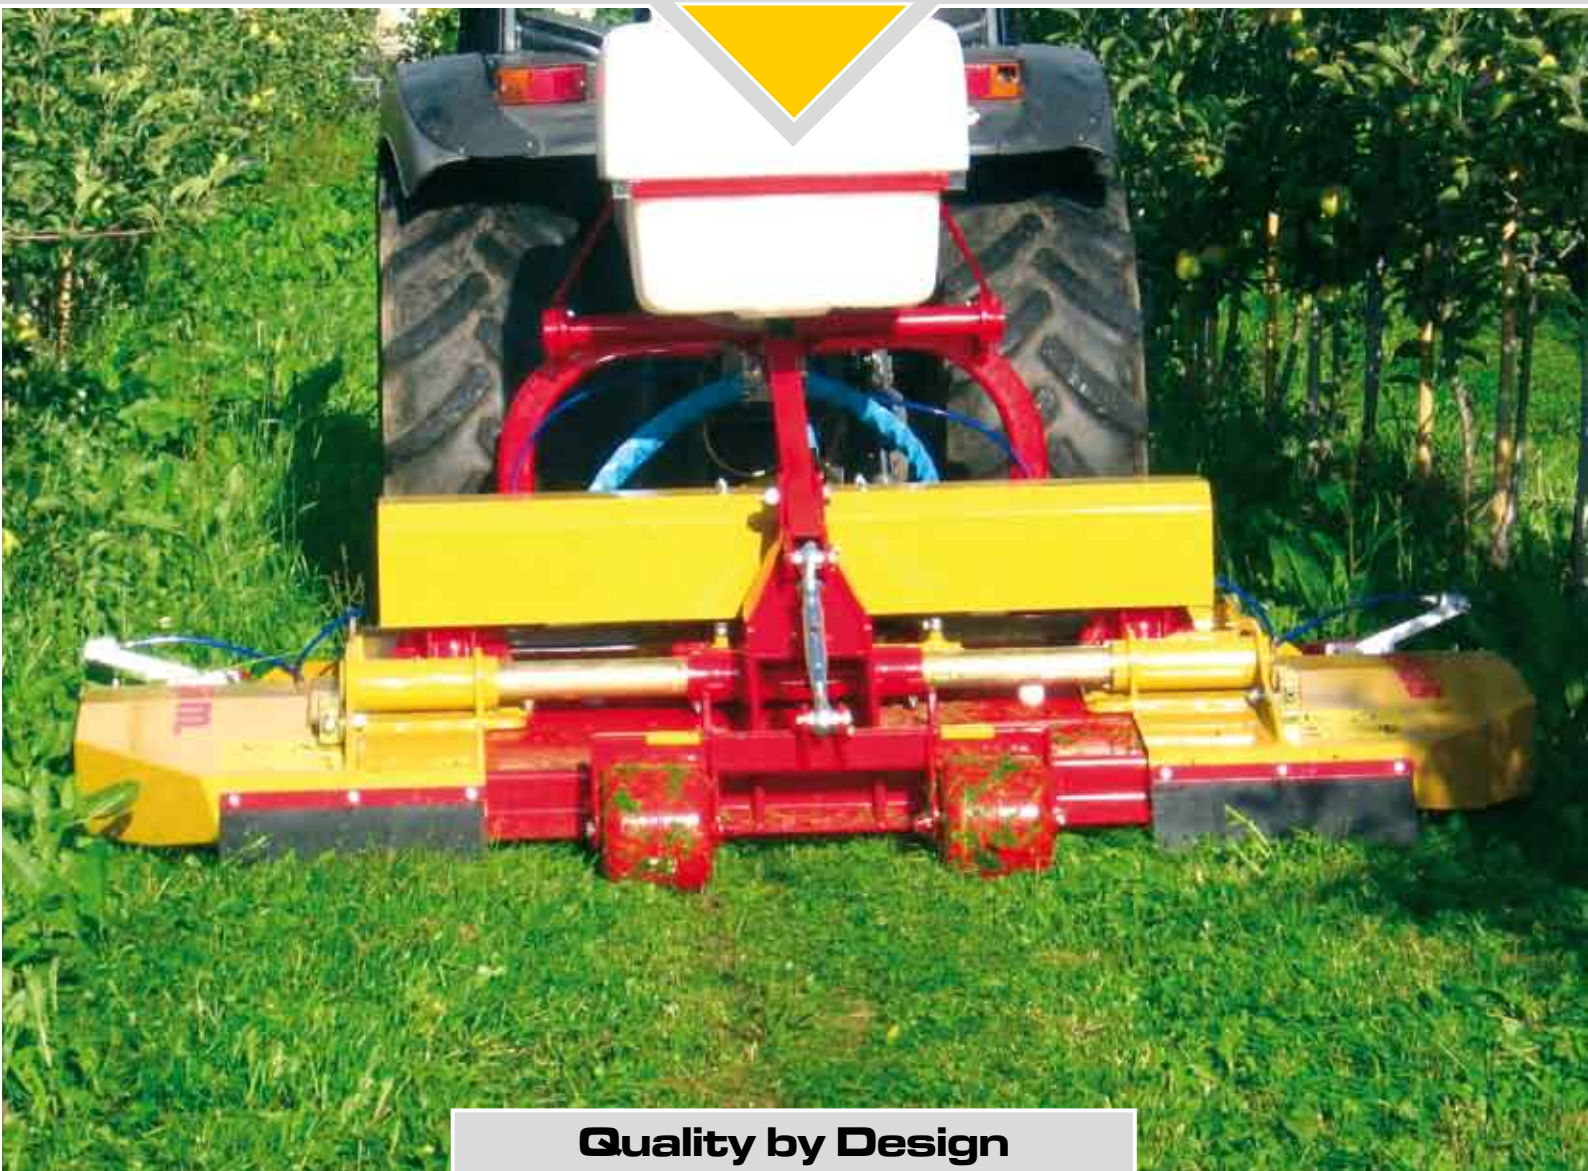

Quality by Design

ROTARY MOWERS

APPLE - APPLE cs
APPLE VARIO - SAR X

26 - 90 HP



INNOVATION

- > nearly 70 years experience, 35 in mowers
- > continuous research for new solutions and technologies
- > optimal material, with low wear

QUALITY

- > every machine is tested before leaving the factory
- > use of the best components only
- > low wear

RELIABILITY

- > high performance machines
- > close to customer sales and service network
- > fast and efficient customer care

ROTARY MOWERS



a satisfied apple farmer


Rotary mowers make easy work of mulching in orchards and vineyards. Their low profile allows mulching close to and around trees, while protecting the fruit.

The aim of SEPPi M. is to help the work of farmers. That's why they focus so much on quality and reliability. Simple maintenance and long life make SEPPi mowers very efficient.


rotary mowers of SEPPi M.:

- › power from 26 to 90 HP
- › different models of rotary mowers for use in orchards, vineyards and greenspace maintenance


Different types of SEPPi rotary mowers, comprehensive view:




APPLE 145
APPLE 170
APPLE cs 145
APPLE cs 170




APPLE cs 200
APPLE cs 220

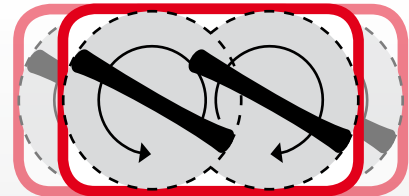

APPLE vario 135 – 185
APPLE vario 170 – 230

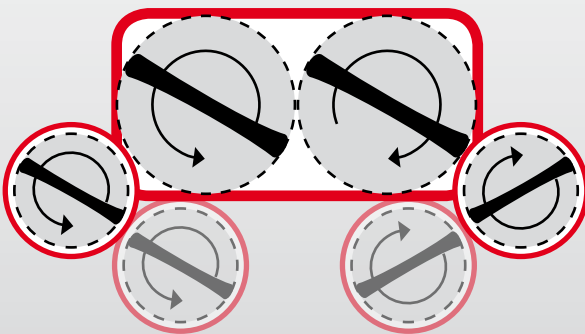

SAR X 150 – 230
SAR X 180 – 300
SAR X 200 – 320

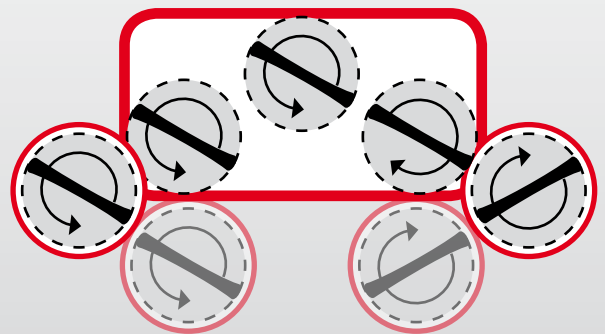

SAR X 250 – 360

Low profile – high performance!

features	APPLE
working speed	6-9 km/h
ISO 3-point-linkage	cat. 1
side shift	hyd., up to 80 cm [31"]
gearbox without freewheel	540 rpm
input shaft	1 3/8" Z=6
reversible rotation direction of the knives	S
roller scraper	S
back and rear support wheels, adjustable	in height and width
hydraulic fittings needed	1 double acting
standard knives	rotating knives


S: standard - O: option - X: not available

The APPLE is a strong rotary mower for mowing grass in orchards and vineyards. Adjustable support wheels make it possible to adjust the mower to the wheel width of the tractor. Adaptation to the ground contours is further helped by the hitch. The reversible direction of rotation of the knives allows discharging the cut material either to the side or centrally behind the mower.



Side shift APPLE

APPLE	d	D
145 [57"]	70 cm [28"]	160 cm [63"]
170 [67"]	65 cm [26"]	189 cm [74"]

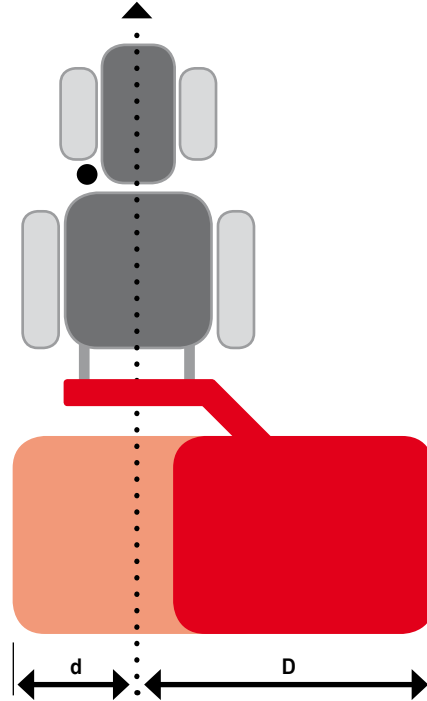

The smaller **APPLE** model has 160 cm [63"] side shift to the right of the center line of the tractor.
The larger model has 189 cm [74"] side shift.

options	APPLE	OPT
PTO shaft with freewheel	O	011
herbicide spraying system XID	O	191
chevrons for transportation on public roads	O	162

S: standard - O: option - X: not available

APPLE							
working width cm ["]	overall width cm ["]	depth cm ["]	height cm ["]	weight* kg [lb]	knives #	kW min-max	HP min-max
145 [57]	150 [59]	168 [66]	95 [37]	411 [162]	4	19-44	26-60
170 [67]	175 [69]	168 [66]	95 [37]	435 [171]	4	20-44	28-60

* The weight of the machine is approximate, it refers to the standard version without any options and it may vary.




Large side shift, both left and right!

features	APPLE cs
working speed	6-9 km/h
cat. 1 & 2 ISO 3-point linkage	reversible
side shift	hyd., up to 80 cm [31"]
gearbox without freewheel	540 rpm
input shaft	1 3/8" Z=6
reversible rotation direction of the knives	S
roller scraper	S
front and rear support wheels, adjustable	in height and width
hydraulic fittings needed	1 double acting
standard knives	rotating knives


S: standard - O: option - X: not available

The APPLE cs perfectly adapts to ground conditions – thanks to its adjustable support wheels and to the floating hitch. The machine is reversible, with possible front attachment. Knives are protected by an anti-shock system. The height of cut is adjustable, grass can be discharged to the sides or down the middle.

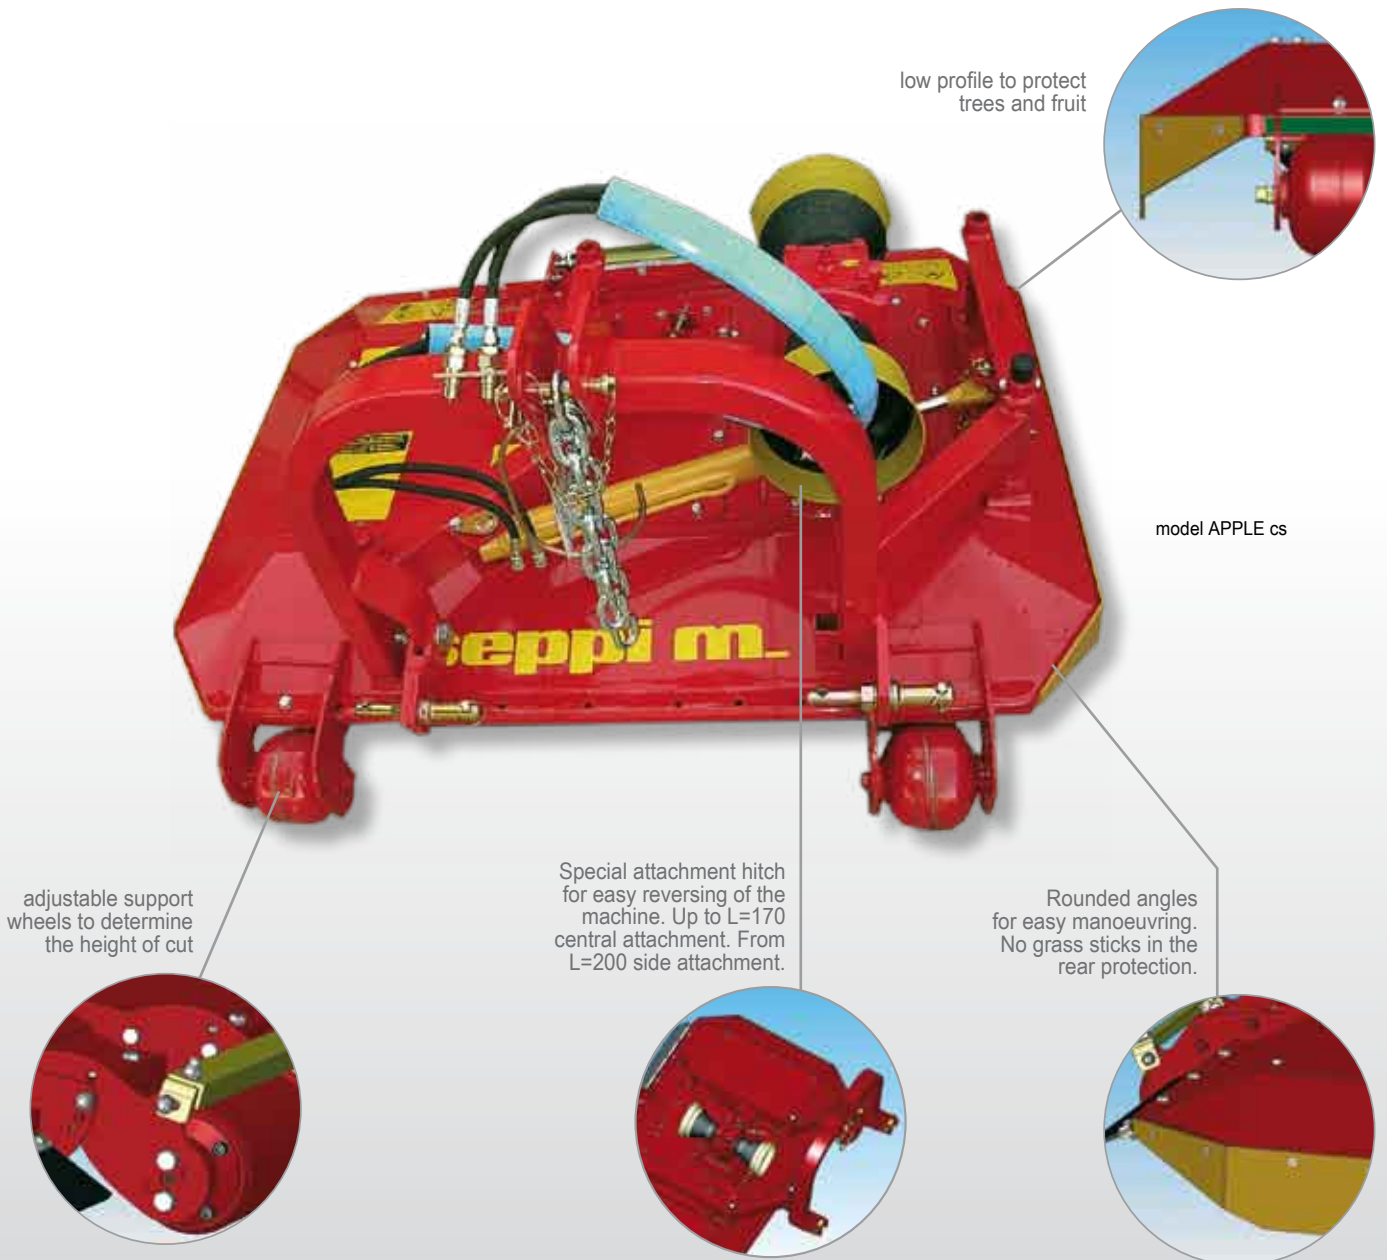

Side shift APPLE cs

APPLE cs	d	D
145 [57"]	70 cm [28"]	132 cm [52"]
170 [67"]	70 cm [28"]	155 cm [61"]
200 [79"]	132 cm [52"]	135 cm [53"]
220 [87"]	138 cm [54"]	143 cm [56"]

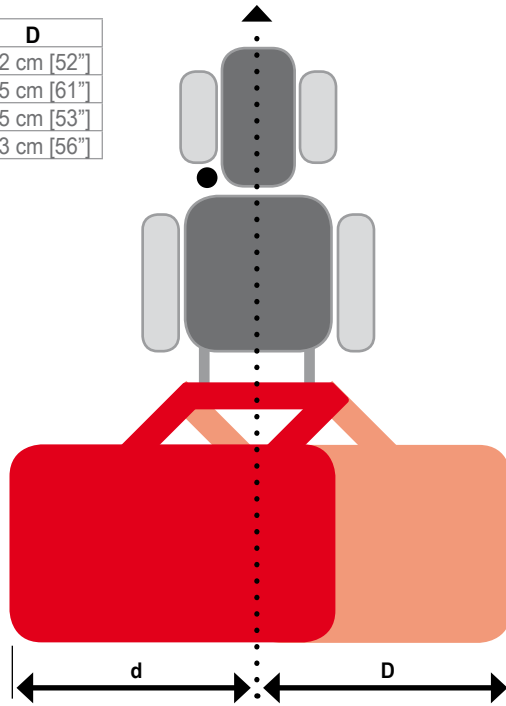


The envelope of movement of the hydraulic side shift varies according to the working width and attachment of the linkage. On the **APPLE cs** 145 and 170 cm the attachment is on the side: the side shift is mainly to the right. On **APPLE cs** 200 and 220 cm the attachment is in the middle and side shift is equal to the right and to the left.

options	APPLE cs	OPT
PTO shaft with freewheel	O	011
front attachment	O	101
1000 rpm gearbox	O	018
herbicide spraying system XID	O	191
chevrons for transportation on public roads	O	162

S: standard - O: option - X: not available

APPLE cs							
working width cm ["]	overall width cm ["]	depth cm ["]	height cm ["]	weight* kg [lb]	knives #	kW min-max	HP min-max
145 [57]	150 [59]	168 [66]	95 [37]	411 [906]	4	19-44	26-60
170 [67]	175 [69]	168 [66]	95 [37]	435 [959]	4	20-44	28-60
200 [79]	205 [81]	168 [66]	95 [37]	480 [1058]	6	20-60	28-80
220 [87]	225 [89]	168 [66]	95 [37]	552 [1216]	6	20-60	28-80

* The weight of the machine is approximate, it refers to the standard version without any options and it may vary.

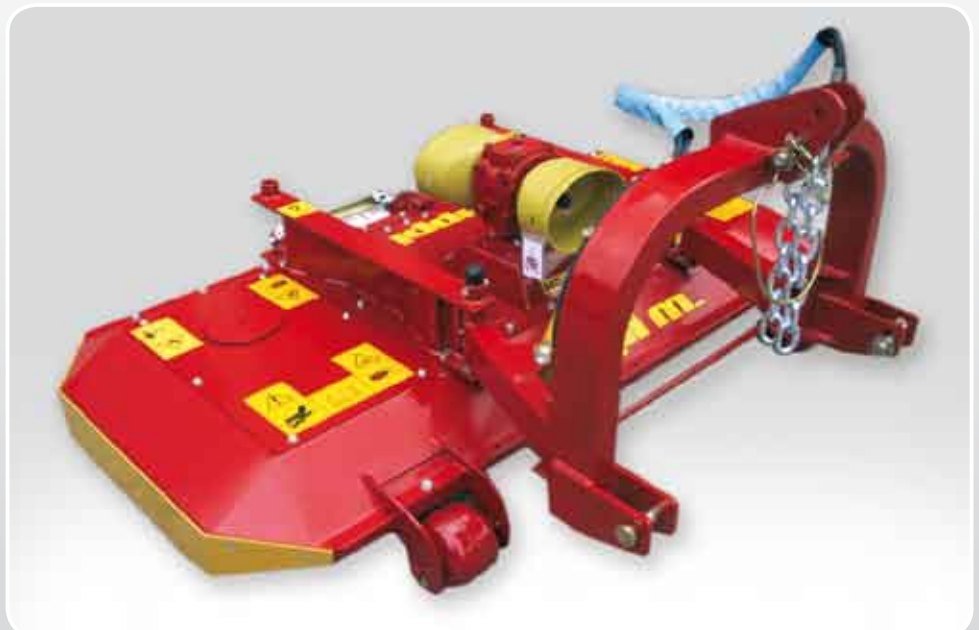


Mulching becomes more fun – with the variable working width!

features	APPLE vario
working speed	6-9 km/h
ISO 3-point linkage	cat. 1 & 2
side shift	hydraulic
gearbox with freewheel	540 rpm
input shaft	1 3/8" Z=6
reversible rotation direction of the knives	S
roller scraper	S
support wheels, adjustable	in height and width
hydraulic fittings needed	3 double acting
standard knives	rotating knives


S: standard - O: option - X: not available

The APPLE vario is a tough rotary mower with variable working width. This is specially useful where rows are irregular. The working width can be varied by 50 cm [20"] (for the APPLE vario 135-185 cm), or by 60 cm [24"] (for the APPLE vario 170-230).

Support wheels are adjustable in height and perfectly adapt to the wheel width of the tractor. Adjustable height of cut additionally provides an ideal result.

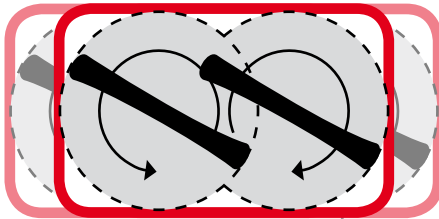


overlapping knives for a regular cut, even with changing working width

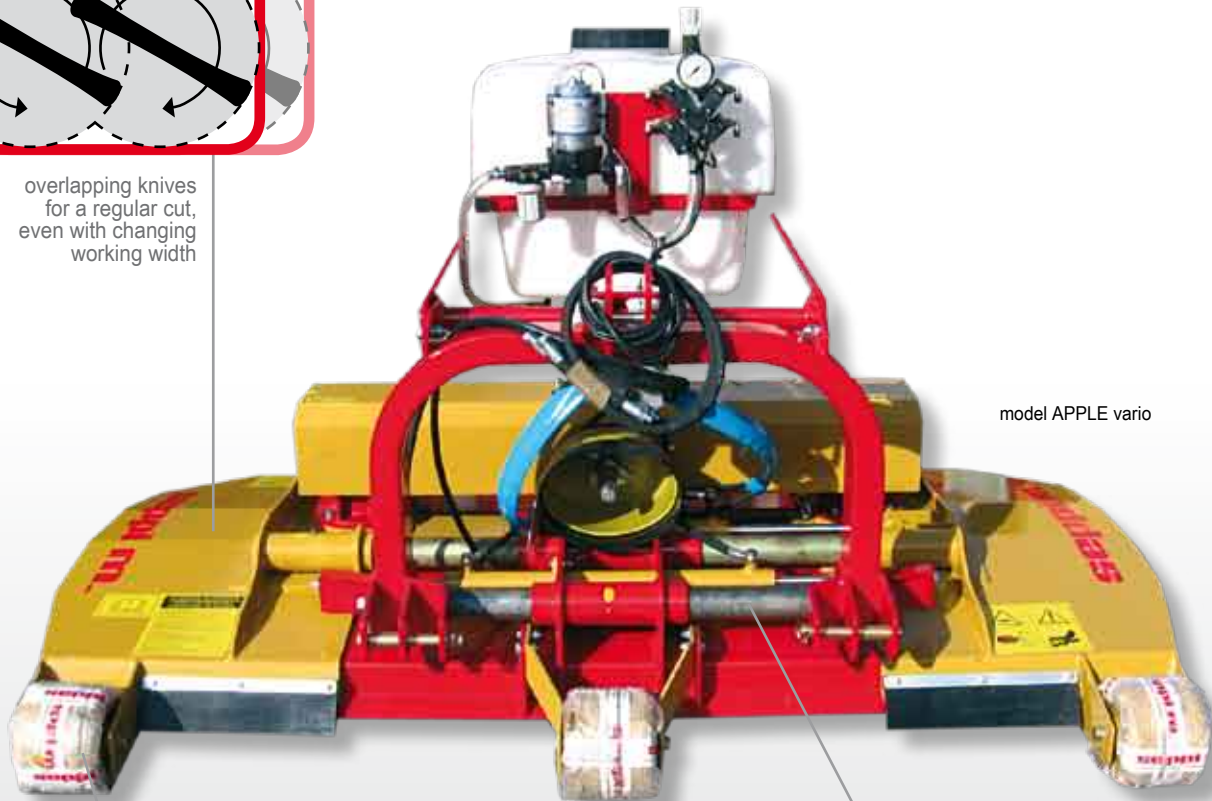

model APPLE vario



when changing the working width, support wheels are adjusted automatically




hydraulic side shift

Side shift APPLE vario

APPLE vario	L min	L max	D
135-185	135 cm [53"]	185 cm [73"]	25 [10"]
170-230	170 cm [67"]	230 cm [91"]	30 [12"]

L = working width

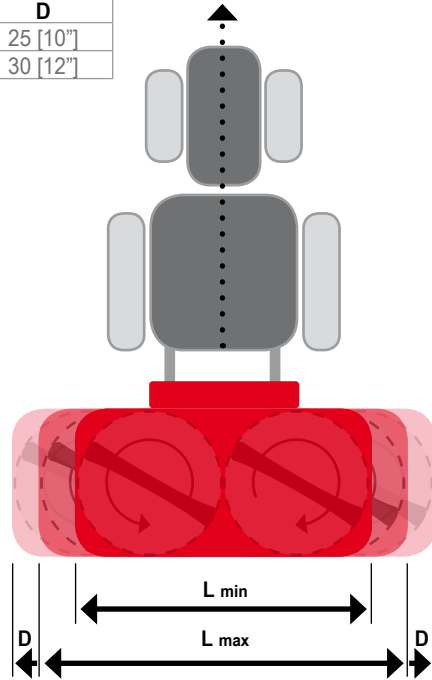

The **APPLE vario** not only has variable working width, it also comes with hydraulic side shift. According to the working width, the side shift is either 25 cm [10"] or 30 cm [12"] to both sides.

options	APPLE vario	OPT
PTO shaft with freewheel	O	011
herbicide spraying system XID	O	191
chevrons for transportation on public roads	O	162

S: standard - O: option - X: not available

APPLE vario							
working width cm ["]	overall width cm ["]	depth cm ["]	height cm ["]	weight* kg [lb]	knives #	kW min-max	HP min-max
135-185 [53-73]	140-190 [55-75]	150 [59]	95 [37]	540 [1190]	4	37-67	50-90
170-230 [67-91]	175-235 [69-93]	150 [59]	95 [37]	600 [1320]	4	37-67	50-90

* The weight of the machine is approximate, it refers to the standard version without any options and it may vary.



The wide little mower.


features	SAR X
working width	6-9 km/h
ISO 3-point linkage	cat. 1 reversible
side shift	hydraulic
gearbox without freewheel	double 540 rpm
input shaft	1 3/8" Z=6
reversible rotation direction of the knives	S
front support wheels, adjustable	in height and width
rear support wheels, adjustable	in height
hydraulic fittings needed	3 double acting
standard knives	rotating knives

S: standard - O: option - X: not available

Two advantages are combined in the double outrigger arm: not only is the working width variable, but also the area in between plants is easily reachable for clean mulching. The outrigger arms are adjustable individually or can be synchronized. A sensitive toucher makes it possible to closely mulch around the trees without damaging them.

Also, the machine has side shift.


The SAR X is a strong grass mower, leaving a clean result even in high grass. Support wheels and floating mechanism allow the mower to follow the contours of the ground.

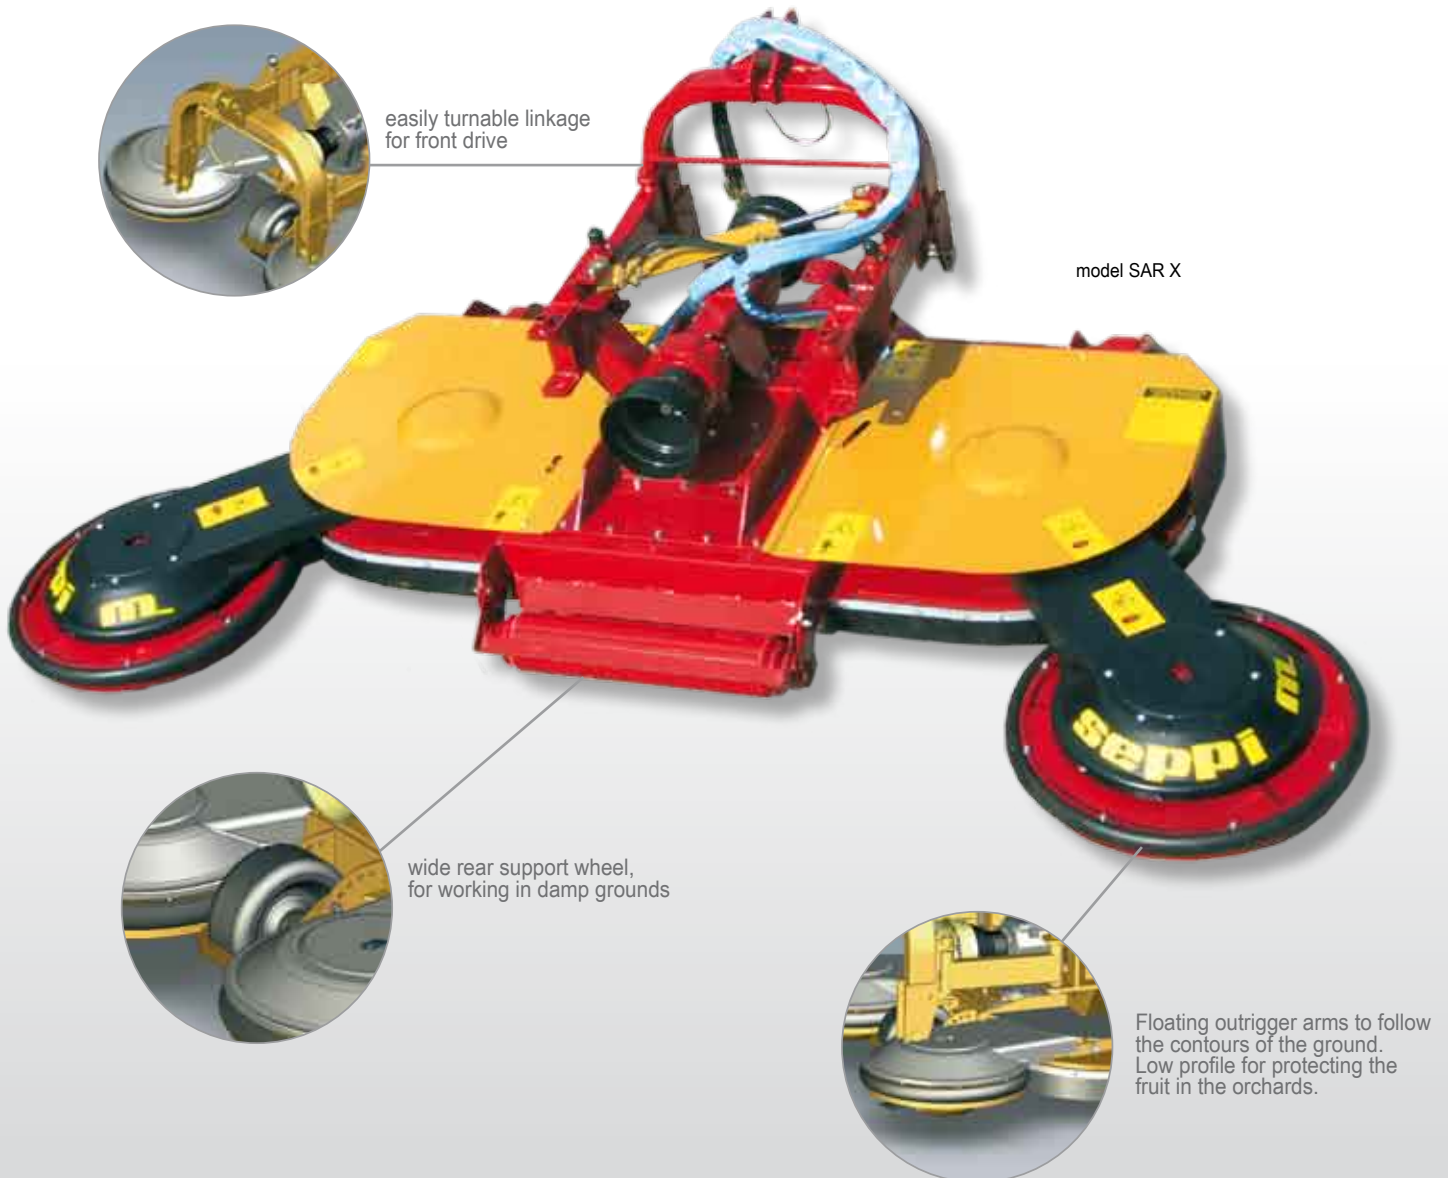

Side shift SAR X

SAR X	L min	L max	D
150-230	150 cm [59"]	230 cm [91"]	35 cm [14"]
180-300	180 cm [71"]	300 cm [118"]	35 cm [14"]
200-320	200 cm [79"]	320 cm [126"]	35 cm [14"]
250-360	250 cm [98"]	360 cm [142"]	35 cm [14"]

L = working width

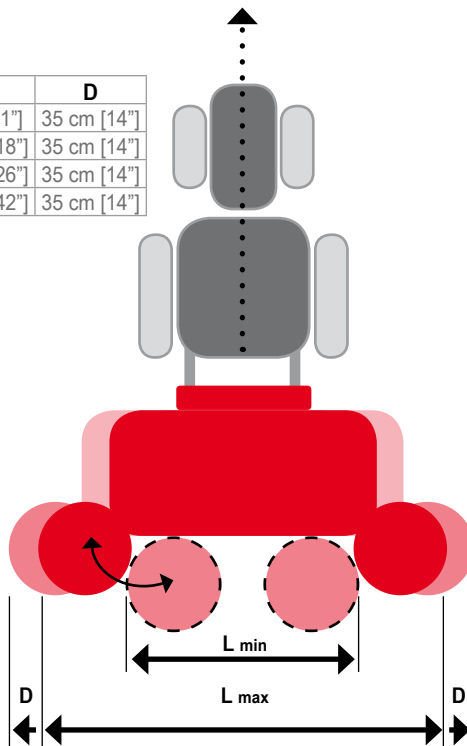

The outrigger arms of the **SAR X** are variable as required. Folded outrigger arms reduce the working width to the minimum. Open the outrigger arms for maximum working width. Side shift is 35 cm [14"], both to the left and to the right.

options	SAR X	OPT
PTO shaft with freewheel	O	011
1000 rpm gearbox	O	018
hyd. remote control	O	144
hyd. sensitive toucher	O	155
herbicide spraying system XID	O	191
chevrons for transportation on public roads	O	162

S: standard - O: option - X: not available

SAR X							
working width cm ["]	overall width cm ["]	depth cm ["]	height cm ["]	weight* kg [lb]	knives #	kW min-max	HP min-max
150-230 [59-91]	240 [94]	180 [71]	105 [41]	390 [860]	4+4	30-59	41-80
180-300 [71-118]	310 [122]	210 [83]	105 [41]	530 [1170]	4+4	30-59	41-80
200-320 [79-126]	330 [130]	215 [85]	105 [41]	620 [1370]	4+4	35-59	48-80
250-360 [98-142]	370 [146]	230 [91]	105 [41]	830 [1830]	6+4	41-59	55-80

* The weight of the machine is approximate, it refers to the standard version without any options and it may vary.



The Advantage of High Quality

Founded in 1939 by Max Seppi and specializing in the manufacture of mowers since 1970, SEPPI M. is now one of the foremost manufacturers in its sector – not only in Italy, but throughout the world.

“The best for farm and forest” – SEPPI’s motto, commit the company to the manufacture of only the best equipment whether for agriculture, forestry or greenspace maintenance.

The decades of experience and tireless research for better technology and materials guarantee products of the highest quality which will provide unrivalled service even in hard conditions.

Discover the advantages offered by the equipment of SEPPI M.!



AGRICULTURAL, FORESTRY AND INDUSTRIAL MULCHERS

SEPPI M. ltd - Zona Artigianale 1 - 39052 Caldaro (Bolzano) Italy
Tel. +39 0471 963550 - Fax +39 0471 962547 - sales@seppi.it - www.seppi.com

AUTHORIZED DEALER

Contact our team for further information!