

695XL

Over 20 years of ICS product innovation and experience culminating in the latest addition to our gas saw family. Everything that makes chain saws the preferable method in cutting concrete, stone, and masonry wrapped in a hungry, power filled package called the 695GC and the 695F4. All the great features from past ICS chain saws plus a few new innovations to make your day go a little easier. Deep, straight cuts and square corners with ease of use and dependable performance to match.

695XL PRODUCT SPECIFICATIONS

Engine Type	2-stroke, Air Cooled
Displacement	94 cc
Horsepower	4.8 kW (6.4 hp) @ 9000 rpm
Torque	5.7 Nm @ 7,200 rpm
Engine Speed	9,300 +/- 150 rpm (max) 2,700 +/- 100 rpm (idle)
Chain Speed at Maximum Power	28 m/s (5500 ft/min)
Weight	9.5 kg powerhead only
Dimensions	46 cm length, 36 cm height 30 cm width
Starter	Recoil, dust and water resistant
Ignition	Special water resistant electronic ignition
Fuel ratio	2% (50:1) gasoline-to-oil
Fuel Capacity	1 liter
Water Supply Requirement	Minimum 1.5 bar
Water Flow Requirement	Minimum: 4lpm
Guaranteed Sound Power Level, L_{wa} (1)	115 dB(A); ($K_{wa} = 1.0$ dB(A))
Equivalent Sound Pressure at the Operator's Ear L_{PA}	104.6 dB(A) ($K = 1.0$ dB(A))
Vibration, $a_{nv,eq}$ Concrete Cutting (2)	3.6 m/s ² ($K = 1.0$ m/s ²) Front Handle 3.1 m/s ² ($K = 1.0$ m/s ²) Rear Handle
Vibration, $a_{nv,eq}$ Pipe Cutting (2)	5.62 m/s ² ($K = 0.2$ m/s ²) Front Handle 5.28 m/s ² ($K = 0.2$ m/s ²) Rear Handle

(1) Measured in accordance with ANSI S12.51-2012/ISO3741:2010


(2) Measured in accordance with ISO5349-1:2001, ISO22867:2011 and ISO19432:2012

ICS, S, BLOUNT EUROPE, SA | Rue Emile Francqui, 5 | 1435 Mont-Saint-Guibert, Belgium TEL +32 10 301 251 | FAX +32 10 301 259


© Copyright 2014-2015 ICS, Blount Inc. Privacy statement specifications subject to change without notice.

Pricing and specifications subject to change without notice. All rights reserved. ICS, WallWalker, SpeedHook, SealPRO, FORCE4 and PowerGrit are registered trademarks of ICS. The best way to cut concrete, DCT, TSS, ProFORCE and TwinMAX are trademarks of ICS 0715



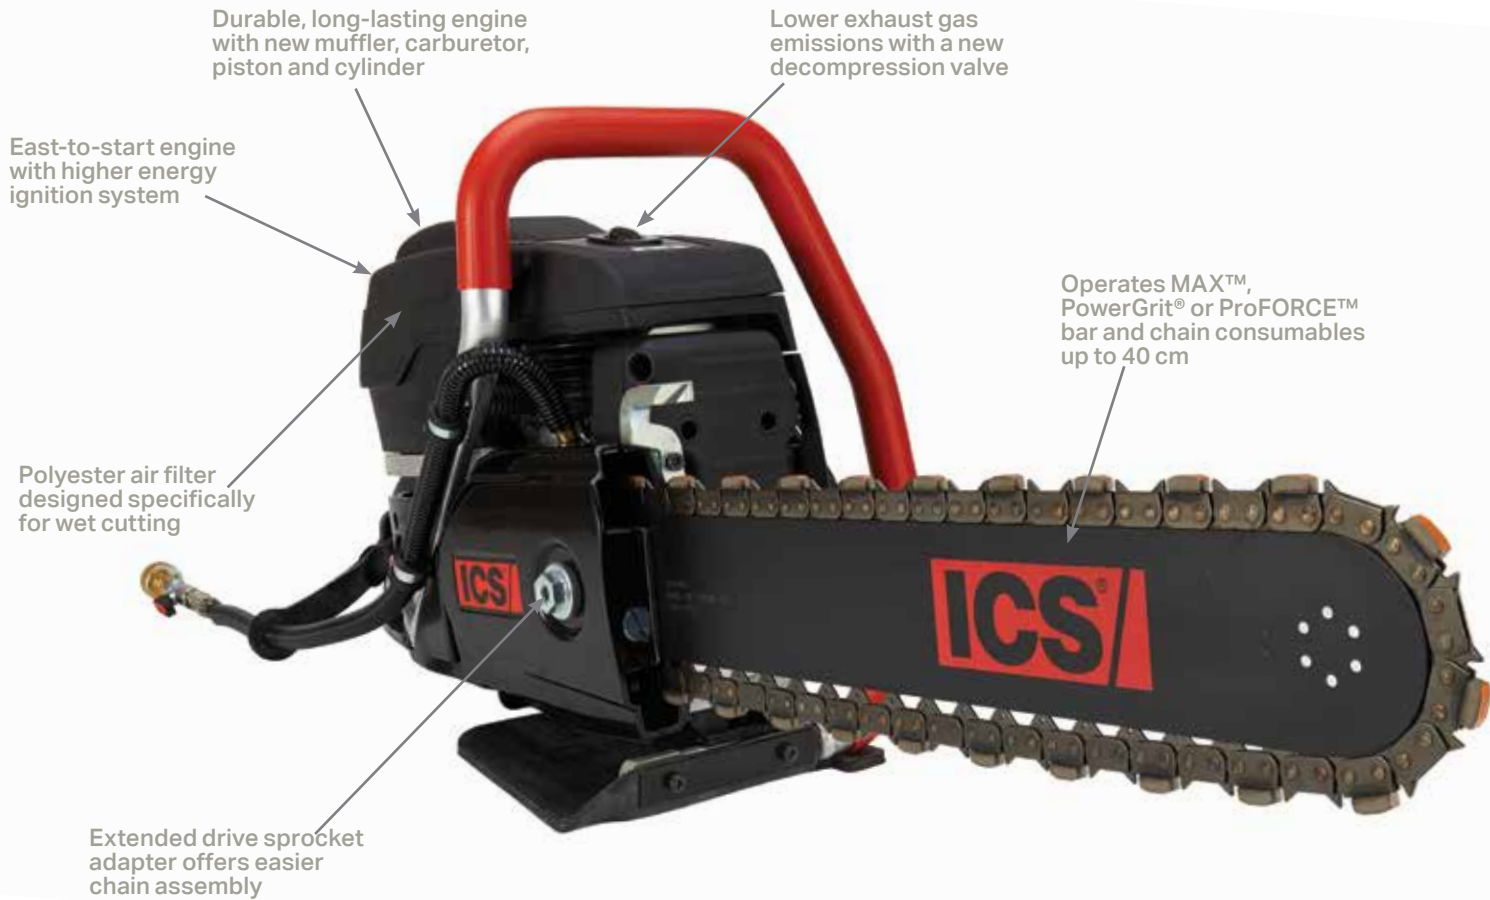

Deep cutting solution for obstructed or small openings



Easy tensioning of chain



Safer to cut ductile iron



Versatile

ICS, S, BLOUNT EUROPE, SA | Rue Emile Francqui, 5 | 1435 Mont-Saint-Guibert, Belgium TEL +32 10 301 251 | FAX +32 10 301 259

© Copyright 2014-2015 ICS, Blount Inc. Privacy statement specifications subject to change without notice.

Pricing and specifications subject to change without notice. All rights reserved. ICS, WallWalker, SpeedHook, SealPRO, FORCE4 and PowerGrit are registered trademarks of ICS. The best way to cut concrete, DCT, TSS, ProFORCE and TwinMAX are trademarks of ICS 0715