

# THE 880F4 SERIES



CONCRETE. STONE. MASONRY. **UNSTOPPABLE**





## 880F4

### A GREAT SAW WITH A BAD ATTITUDE

The new 880F4 cutting system offers the superior strength of FORCE4™ technology in a package that meets industry standards of design and ergonomics. Built for the hardcore cutter, this sleek powerhouse is packed with features designed to make it the hardest working saw ICS® has ever made.

#### SAW SELECTION

In addition to cutting depth and power requirements, estimated frequency of use is important when selecting a saw. Use the chart below to determine the right saw for your cutting needs.

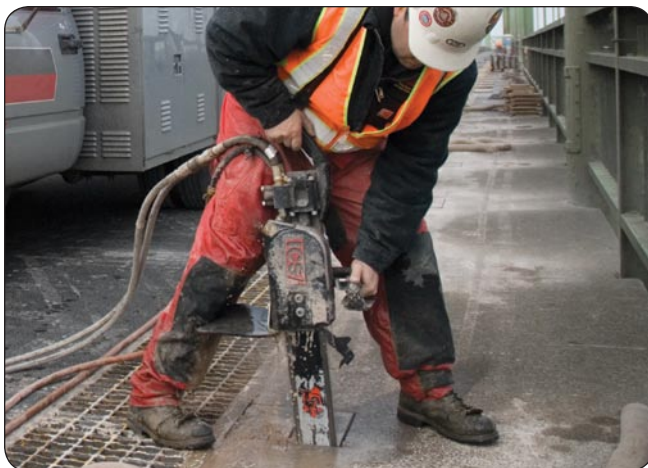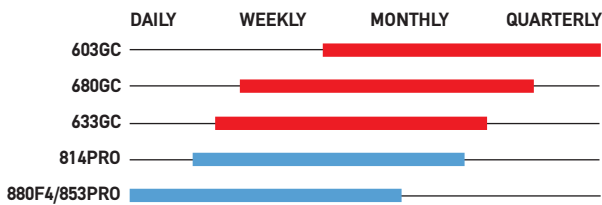

#### 880F4 PRODUCT SPECIFICATIONS - 8 GPM

WEIGHT	27.3 lbs (12.4 kg) with 15-inch (38 cm) bar and chain
BAR LENGTH	Up to 25 in (63 cm)
MOTOR SPEED	6100 rpm
POWERHEAD DIMENSIONS	23 in (58.5 cm) length 10.5 in (26.5 cm) height 9.5 in (24 cm) width
TORQUE	122 in-lbs
HORSEPOWER	11.5 hp
HYDRAULIC SUPPLY	8 gpm (30 lpm), 2500 psi (172.5 bar)
NOISE LEVEL	88 dB @ 3 ft (1 m)
VIBRATION LEVEL	4 meters/second <sup>2</sup> (front handle)
WATER SUPPLY	Minimum 20 psi (1.5 bar)

• Product data shown is rated based on maximum input conditions and efficiency assumptions and may vary dependent on power supply.

#### 880F4 PRODUCT SPECIFICATIONS - 12 GPM

WEIGHT	27.3 lbs (12.4 kg) with 15-inch (38 cm) bar and chain
BAR LENGTH	Up to 25 in (63 cm)
MOTOR SPEED	6400 rpm
POWERHEAD DIMENSIONS	23 in (58.5 cm) length 10.5 in (26.5 cm) height 9.5 in (24 cm) width
TORQUE	172 in-lbs
HORSEPOWER	17.5 hp
HYDRAULIC SUPPLY	12 gpm (45 lpm), 2500 psi (172.5 bar)
NOISE LEVEL	88 dB @ 3 ft (1 m)
VIBRATION LEVEL	4 meters/second <sup>2</sup> (front handle)
WATER SUPPLY	Minimum 20 psi (1.5 bar)

• Product data shown is rated based on maximum input conditions and efficiency assumptions and may vary dependent on power supply.